


CLAMP-FAST SPECIFICATIONS

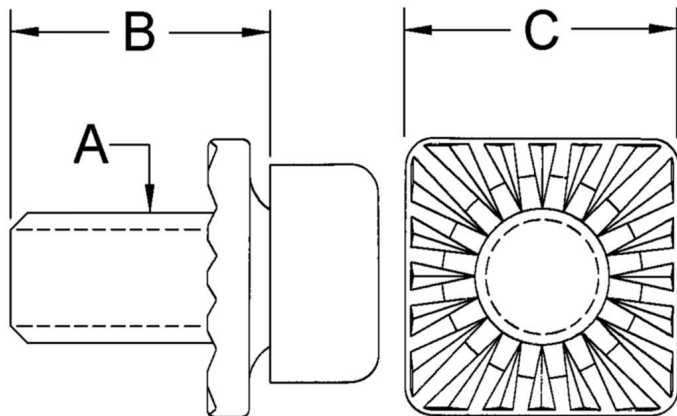

Various head types are available for all combinations shown. The Clamp-Fast is available in thread forming, self-tapping and self-centering. Sizes other than those shown below are available on special order.

For additional information on this product, contact us with your name, address and day-time phone number and we will have a fastener expert contact you.

FOR WIRE SIZES	* to *	22 to 16	22 to 16	22 to 12	18 to 10	18 to 10
SAE Specifications						
"A"	3-48	4-40	5-40	6-32	8-32	10-32
"B"	7/32" to 7/16"	7/32" to 7/16"	1/4" to 7/16"	1/4" to 1/2"	9/32" to 1/2"	10/32" to 1/2"
"C"	Table-3	Table-4	Table-5	Table-6	Table-8	Table-10

* Contact Fastron for available wire sizes.

NOTE: All washer sizes are available in either steel or brass.

FOR WIRE SIZES	22 to 16	22 to 16
Metric Specifications		
"A"	M 3.0	M 3.5
"B"	6mm to 13mm	6mm to 13mm
"C"	Table-30	Table-35

TABLE-3
"C"
.190/.182
.192/.188
.198/.192

TABLE-4
"C"
.230/.225
.243/.237
.255/.250

TABLE-5
"C"
.230/.250
.255/.250
.250/.245

TABLE-6
"C"
.271/.266
.290/.284
.300/.294
.315/.311
.317/.313
.355/.345

TABLE-8
"C"

.327/.322

.355/.345

.376/.367

.380/.370

.409/.403

TABLE-10

"C"

.437/.431

.500/.494

TABLE-30

"C"

6.88/6.75

5.84/5.71

6.47/6.35

8.05/7.89

TABLE-35

"C"

6.98/6.85

7.62/7.49
